

SWIVEL TYPE ACCESS VALVES

ADAPTERS - COUPLERS



MV-2000	1/4" FFL swivel with depressor and rubber seal x 1/4" MFL with hex pad Straight.
MV-2010	1/4" FFL swivel with depressor and rubber seal x 1/4" MFL with hex pad 90° elbow.
QC-E64	90° ADAPTER 1/4" MFL x 3/8" FFL swivel with rubber seal. <i>PLEASE NOTE: without depressor.</i>
MV-2038	1/4" FFL swivel with depressor and rubber seal x 3/8" MFL with hex pad.
MV-2018	1/4" FFL swivel with depressor tip and rubber seal x 1/8" MPT with hex pad.
MV-2014	1/4" FFL swivel with depressor tip and rubber seal x 1/4" MPT with hex pad.
MV-2012	1/4" FFL swivel with depressor tip and rubber seal x 1/2" ACME male <i>AUTOMOTIVE AIR-CONDITIONING SYSTEM...</i>
MV-2028	1/4" MFL x 1/2" ACME female swivel with depressor tip and rubber seal <i>AUTOMOTIVE AIR-CONDITIONING SYSTEM...</i>
MV-2019	1/4" FFL swivel with depressor tip and rubber seal x 1/8" FPT (hex shape).
MV-2041	1/4" FFL with depressor tip and rubber seal x 1/4" FPT (hex shape).
MV-2020	1/4" FFL (hex solid mounting pad) x 1/2" ACME male <i>AUTOMOTIVE AIR-CONDITIONING SYSTEM...</i>

- These parts simply make connections between equipment with unlike threads.
- The *ADAPTERS* made from hex stock brass are for permanent installations.
- The *COUPLERS* start with a 1/4" female flare SAE **swivel** and end with different flare sizes, pipe threads and ACME threads

SWIVEL DEPRESSOR ADAPTERS

- These QUICK SWIVEL ADAPTERS are used for monitoring system pressure anywhere in refrigeration or air-conditioning systems where there is a standard ACCESS VALVE.
- Knurled swivel end (90° or straight) has a standard CORE-DEPRESSOR and rubber seal to mate with all ACCESS VALVES.

QC-S4A	STRAIGHT ADAPTER 1/8" FPT x 1/4" FFL swivel nut
QC-S4B	STRAIGHT ADAPTER 1/4" FPT x 1/4" FFL swivel nut
QC-S4	STRAIGHT ADAPTER 1/4" MFL x 1/4" FFL swivel nut
QC-S46	STRAIGHT ADAPTER 3/8" MFL x 1/4" FFL swivel nut
QC-S64	STRAIGHT ADAPTER 1/4" MFL x 3/8" FFL swivel nut <i>PLEASE NOTE: without depressor</i>

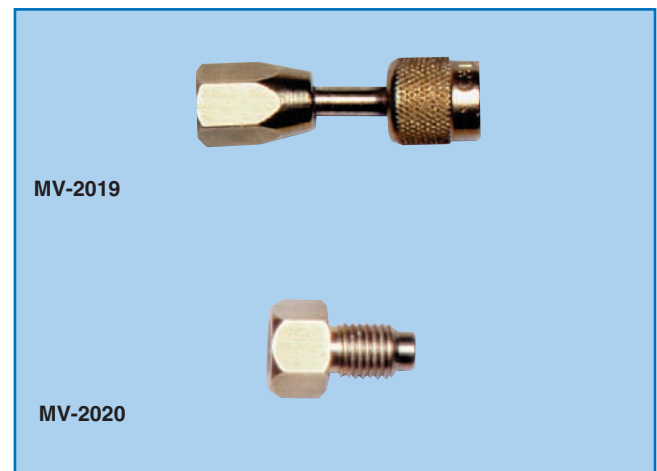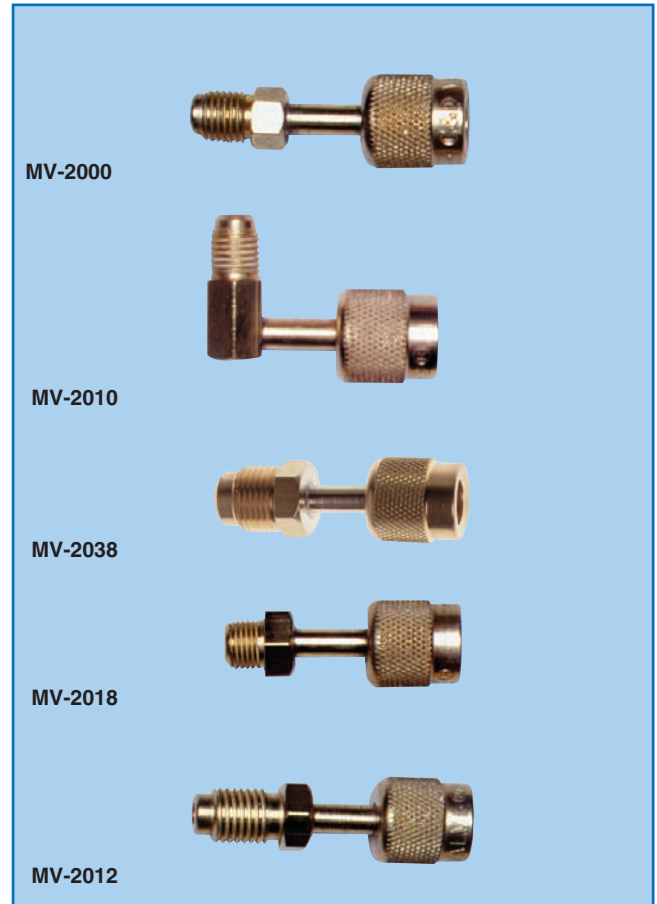

“SURE SEAL” RETAINING COUPLERS & AUTOMATIC HOSE SELF CLOSING

MV-2035 1/4" FFL with “SURE SEAL”
x 1/4" MFL Straight.

MV-2090 1/4" FFL with “SURE SEAL”
x 1/4" MFL 90° elbow.

MV-2037 1/4" FFL with “SURE SEAL”
x 3/8" MFL.

MV-2098 1/4" FFL with “SURE SEAL”
x 1/8" FPT.

MV-2094 1/4" FFL with “SURE SEAL”
x 1/4" FPT.

MV-5171 Kit of replacement parts for all “SURE SEAL”
Contains GASKETS, DEPRESSOR and SPRING.

When attached to an access valve or fitting, the “SURE SEAL” retaining coupler automatically opens and depresses the valve core all in one action. The “SURE SEAL” back checks the gas.

- When disconnected, it traps refrigerant in the charging hose.
- Leave it permanently installed at the end of the hose. The seals are compatible with **CFC**, **HCFC**, **HFC** and their lubricants.
- NB: If internal parts need replacing, use parts kit **MV-5171**.

