

METRIC COPPER TUBE FITTINGS

REFRIGERATION QUALITY

SYMBOLS USED FOR FITTING ENDS

- “C” : Copper cup manufactured to receive copper tube diameter (as an ODS solder connection). The copper tube can be “slipped-in” any “C” fitting end (Female).
- “FTG” : Fitting ends made to copper tube diameter. Can be “slipped-in” any “C” fitting end (Male).


NOTE

- All solder cups (C) and fitting ends (FTG) size description are expressed in outside diameter (OD) tube size.

Note: According to the PED Directive 97/23/EC all open ended copper tubes and fittings as supplied by ITE will be classified in the SEP (Sound Engineering Practices) category by reference to article 3 paragraph 3 of the PED. A CE mark cannot be applied to these tubes and fittings, because all appropriate manufacturing operations such as bending, connection (soldering) and heat treatment have not been completed, as they will be completed in the field, during installation process, to render them fit for their intended purpose.

NORMS

- Real A/C & R COPPER FITTINGS
- Strictly conform to BS 864 Part 2
- Strictly conform to DIN 2856

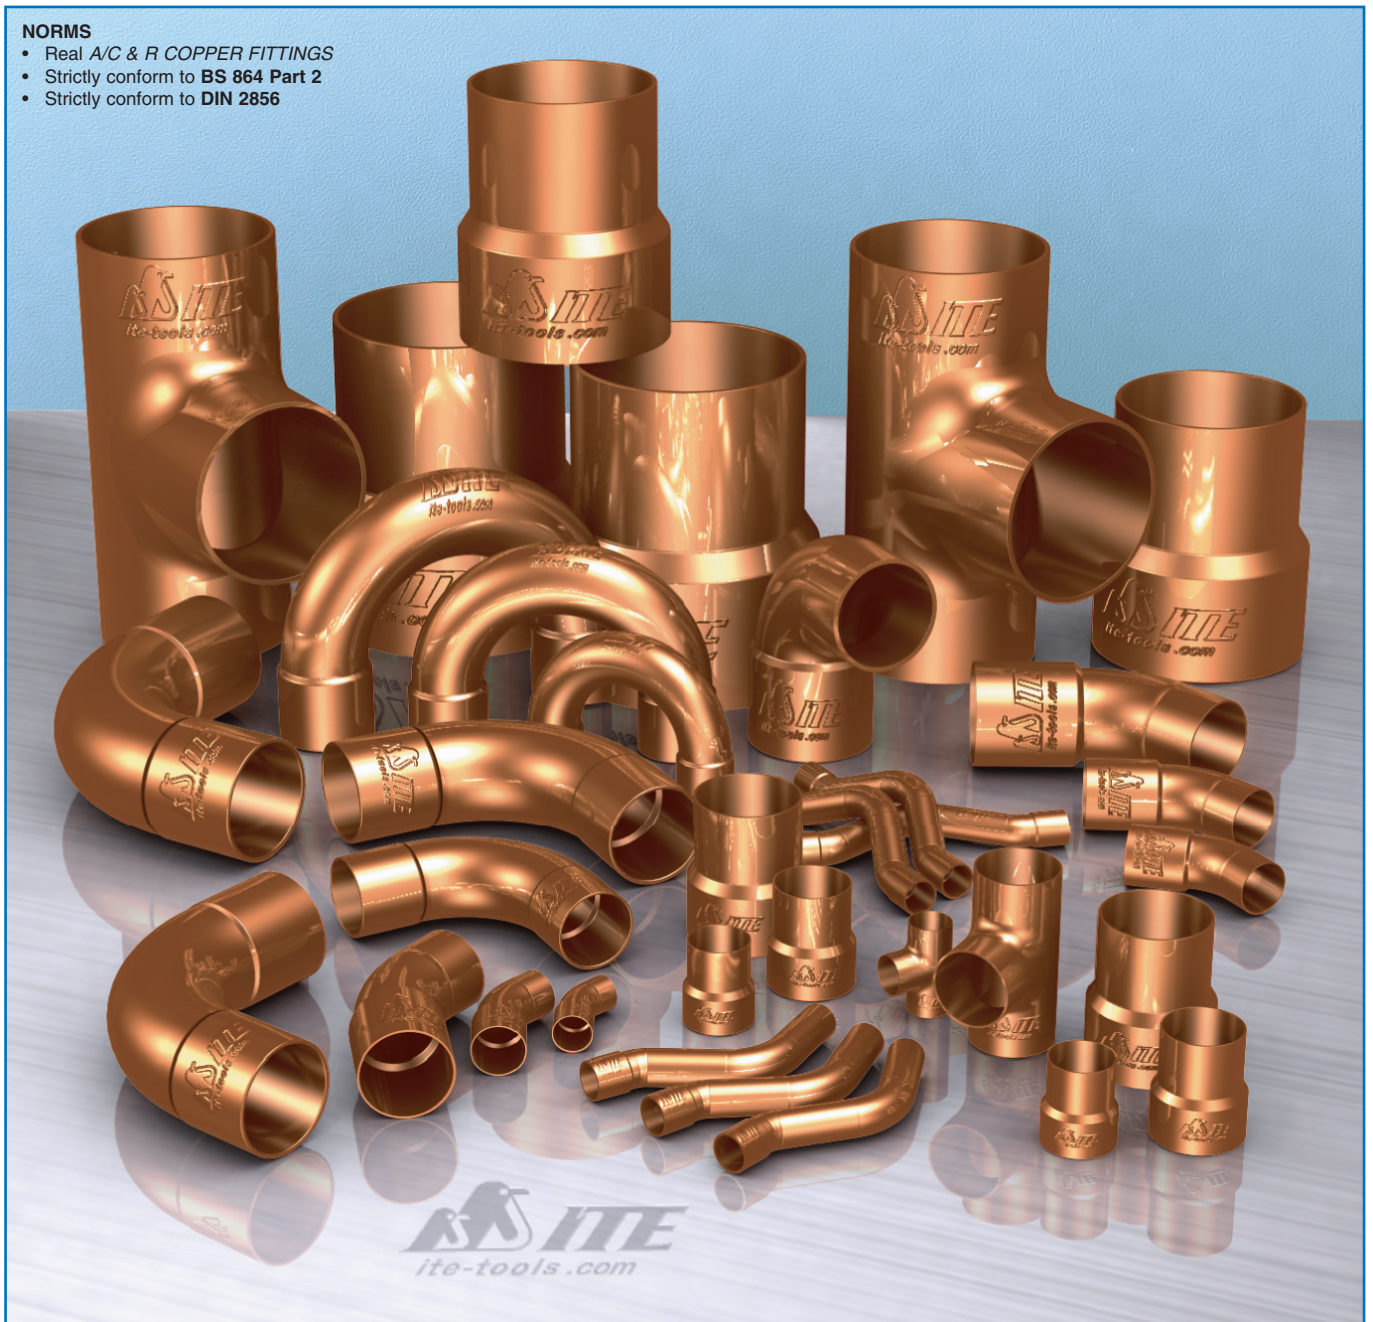

DIMENSIONS

- Dimensions of products illustrated are for general estimating purposes and based on the latest data.
- Dimensions are subject to revision without immediate notice (codes, manufacturing, market demand, etc)
- Dimensions and tolerances according to DIN EN 1254-1.
- Material quality is in conformity with EN 10204 and EN 12449 standards.