


7. PANEL MOUNT & POCKET THERMOMETERS

PM-120C

PANEL MOUNT PLASTIC THERMOMETER With 1,5 V DC battery.

FEATURES

- Rectangular remote reading thermometer ideal for use where mounting space is limited or where a plastic housing is preferred.
- White polycarbonate body. ABS plastic probe with thermistor sensor in stainless steel tip.
- Remote sensor length: **1 metre (39")**.
- 47,5 mm x 15,8 mm LCD display.
- **ON/OFF** button.
- °C/°F selection button.
- **MAX/MIN** button.
- Temperature range: **-40°C to +50°C** (-40°F to +122°F).
- Resolution: **0,1°C** (0,1°F).
- Accuracy: **± 1°C** (± 1,8°F) from **-20°C to +50°C** (-4°F to +122°F)
± 2°C (± 3,6°F) below **-20°C** (-4°F)
- Ambient temperature range: **-18°C to +48°C** (0°F to + 120°F)
- Response time: **30 seconds**.
- Operating temperature: **-18°C to +50°C** (0°F to +120°F).
- **1,5 V AA** battery included (battery life approx. 1 year).
- Dimensions: **69 mm x 36 mm x 28 mm** (2,7" x 1,4" x 1,1").
- Cutout for mounting: **60,3 mm x 20,6 mm** (2,375" x 0,812").
- 6 months warranty.

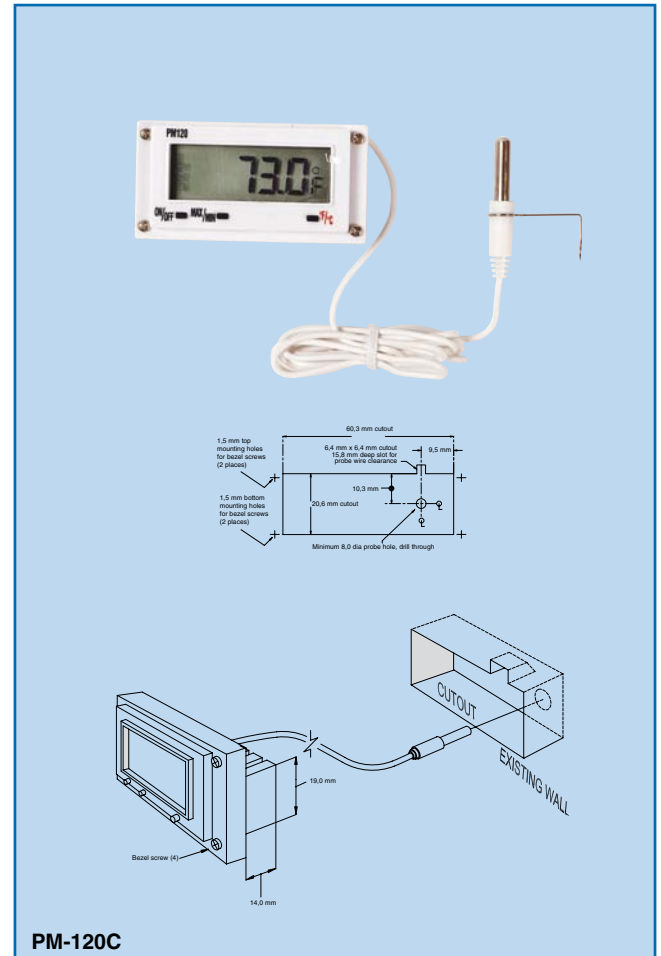

TPM-62 PANEL MOUNT PLASTIC THERMOMETER
 with capillary remote sensor


FEATURES

- Rectangular thin shape, depth **56 mm**.
- Fixing system with moulded-in elastic clips.
- Capillary length 1,5 meter plastic covered.
- Temperature range: **-40°C to +40°C**.
- 6 months warranty.

TPM-58 PANEL MOUNT PLASTIC THERMOMETER
 with capillary remote sensor

FEATURES

- Rectangular shape, depth **52 mm**.
- Fixing system with moulded-in elastic clips.
- Capillary length 1,5 meter plastic covered.
- Temperature range: **-40°C to +40°C**.
- 6 months warranty.

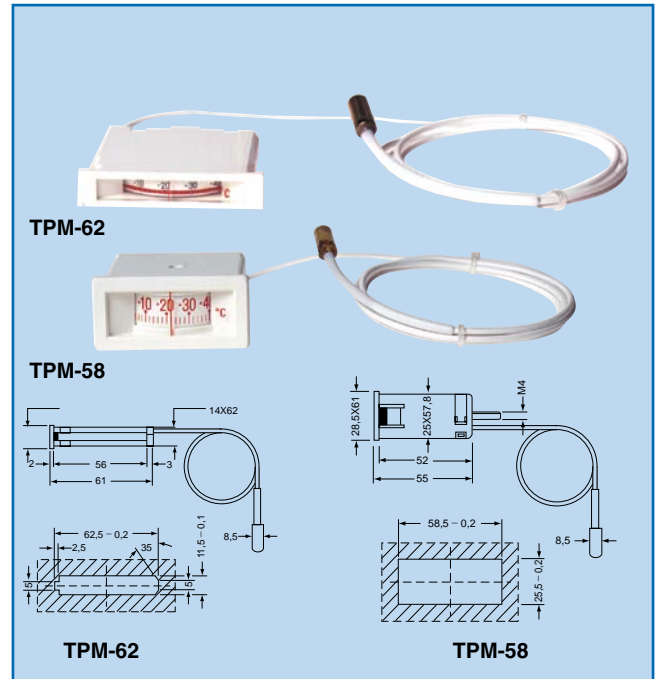

DT-1001C HORIZONTAL WALL MOUNT THERMOMETER

FEATURES

- **1,2 m (48")** wire sensor.
- **114 mm x 29 mm x 16 mm**.
- Works by solar power and has an easy to replace battery to provide power once light level decreases (battery included).
- Temperature range: **-40°C to +70°C**.
- 6 months warranty.




DPS-300C DIGITAL ELECTRONIC SWIVEL HEAD POCKET THERMOMETER

Designed and ideal for use in air conditioning, Refrigeration, heating, automotive, etc...

FEATURES

- Never need calibration. Stainless steel stem with pocket clip case.
- Battery A76 (1,5 V) included.
- Battery life: **6 months**.
- **3 seconds** update.
- Swivel head orientable: **30°, 60° and 90°**.
- Stem length: 127 mm (5")
- Ambient temperature of use: **-10°C to +40°C** (+14°F to +104°F).
- Reading temperature range: **-50°C to +150°C** (-58°F to +302°F).
- Accuracy: **± 1°C** (± 2°F) from **-18°C to +71°C** (0°F to +160°F)
± 2°C (± 4°F) all other ranges
- 6 months warranty.

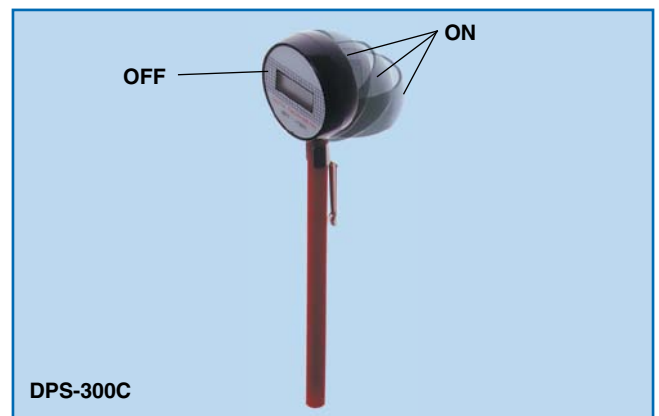

DGT-1415C POCKET THERMOMETER

FEATURES

- Precision temperature instrument for refrigeration, air conditioning, food service, industrial, laboratory, automotive, general purpose.
- **32 mm (1 1/4")** diameter.
- **127 mm (5")** stainless steel stem with pocket clip case.
- Temperature range: **-50°C to +150°C**.
- Resolution: **0,1°C** between **-19°C and +150°C**.
1°C all other ranges.
- Battery: 1 x 1,5 V or equivalent (included).
- 6 months warranty.

