


MEASURING TOOLS

CAPILLARY TUBE GAUGE A-10971 (CTG-2)

A-10971 CAPILLARY TUBE GAUGE for gauging ID and OD of capillary fusing.


- Made of surgical stainless steel. Precision engineered.
- Suitable for left or righthanded use. Chrome plated handle.
- 14 I.D. sizes from: 0,026" to 0,090".
- 22 O.D. sizes from: 0,072" to $\frac{7}{16}$ " (5 mm to 12 mm).

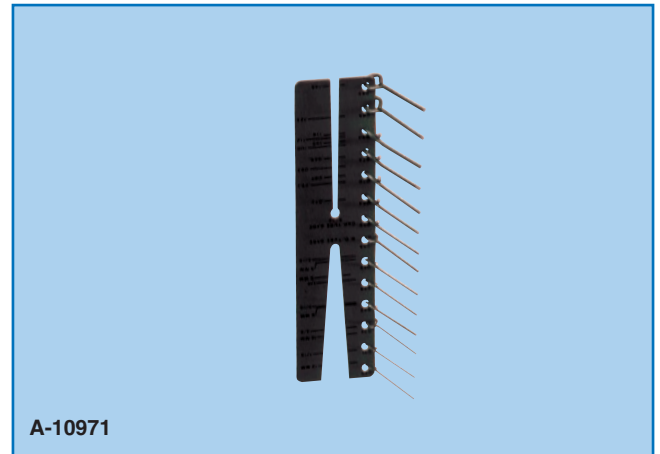

SCREW PITCH GAUGES

TG-01 SCREW PITCH GAUGES

- Metric 60°: 0,25, 0,3, 0,35, 0,4, 0,45, 0,5, 0,6, 0,7, 0,75, 0,8, 0,9, 1,0, 1,25, 1,5, 1,75, 2,0, 2,5, 3,0, 3,5, 4,0, 4,5, 5, 5,5, 6.
- Whitworth 55°: 4, 4,5, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 16, 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 36, 40, 48, 60, 62.

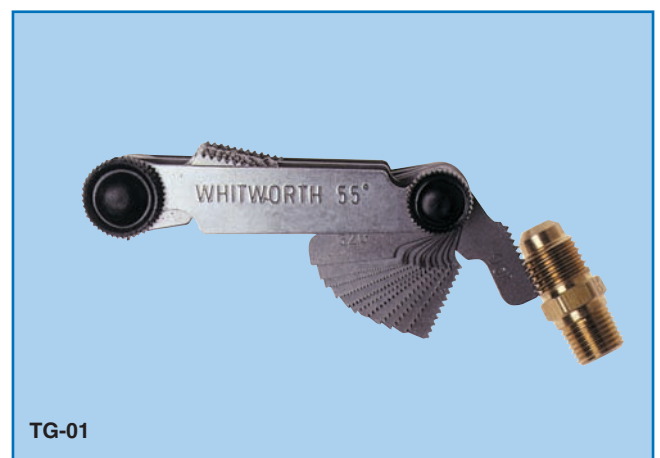

DIGITAL CALIPER

DC-5150 DIGITAL CALIPER

FEATURES

- LCD display 5 digits and "mm", "IN" and "-" signs.
- mm/inch selectable.
- Zero setting at any position within range.
- Slider fixing screw.
- Measuring range: **150 mm x 0,01 mm** (6" x 0,0005").
- Accuracy: **0,03 mm** (0,0015").
- Operating temperature: **0°C to +40°C** (+32°F to +104°F).
- Operating humidity: max 80% RH.
- Serial output for computer interface and printer.
- Power supply: 1,5 V silver oxide battery included (\pm 1 year of continuous use).
- Size: **234 mm x 77 mm x 15 mm** ($9\frac{1}{5}$ " x 3" x $\frac{5}{8}$ ").
- Weight: **145 g** (0,32 lb).
- Included: instruction manual, case, 1 battery.

