

FASTENING AND FIXING SOLUTIONS

- These cushion clamp assemblies eliminate metal-to-metal contact when securing copper tubing in AIR-CONDITIONING, REFRIGERATION and WATER installations.
- These cushions resist most fuels, oils, gases, greases, solvents, minerals, acids, etc...
- Simplified installation: Only 1 man and 1 tool needed for assembly.

1. RAPID LIGHTWEIGHT CUSHION CLAMPS

- Steel sheet with M8, M10 nuts
- Width: 20 mm, thickness: 1,2 mm
- Bolt: OD 5 mm, length 25 mm
- Hex Nut: Hex 15 mm, length 15 mm M8/M10
- Temperature range : -50°C to + 110°C

UNLINED

PART. NR.	SIZE	RANGE	PART. NR.	SIZE	RANGE
FSCC-0507	1/4"	05-07 mm	FSCC-4244	1 5/8"	42-44 mm
FSCC-0710	3/8"	07-10 mm	FSCC-5255	2 1/8"	52-55 mm
FSCC-1113	1/2"	11-13 mm	FSCC-5864	2 3/8"	58-64 mm
FSCC-1315	5/8"	13-15 mm	FSCC-6571	2 5/8"	65-71 mm
FSCC-1619	3/4"	16-19 mm	FSCC-7280	3 1/8"	72-80 mm
FSCC-2022	7/8"	20-22 mm	FSCC-8892	3 5/8"	88-92 mm
FSCC-2528	1 1/8"	25-28 mm	FSCC-98107	4 1/8"	98-107 mm
FSCC-3335	1 3/8"	33-35 mm			

RUBBERLINED

PART. NR.	SIZE	RANGE	PART. NR.	SIZE	RANGE
FSCC-0507-R	1/4"	05-07 mm	FSCC-4244-R	1 5/8"	42-44 mm
FSCC-0710-R	3/8"	07-10 mm	FSCC-5255-R	2 1/8"	52-55 mm
FSCC-1113-R	1/2"	11-13 mm	FSCC-5864-R	2 3/8"	58-64 mm
FSCC-1315-R	5/8"	13-15 mm	FSCC-6571-R	2 5/8"	65-71 mm
FSCC-1619-R	3/4"	16-19 mm	FSCC-7280-R	3 1/8"	72-80 mm
FSCC-2022-R	7/8"	20-22 mm	FSCC-8892-R	3 5/8"	88-92 mm
FSCC-2528-R	1 1/8"	25-28 mm	FSCC-98107-R	4 1/8"	98-107 mm
FSCC-3335-R	1 3/8"	33-35 mm			



FSCC-0710-R

FSCC-3335

2. CONSOLES

- For wall mounting

FSCO-3550	CONSOLE CA, 35 x 35 mm, length: 500 mm
FSCO-3575	CONSOLE CA, 35 x 35 mm, length: 750 mm

3. PROFILES

- Electro zinc plating

FSP2-3419	PROFILE CK, 34 x 19 mm, length: 2 m
FSP3-3535	PROFILE CK, 35 x 35 mm, length: 3 m

END CAPS

FSEC-3419	END CAP for profile 34 x 19
FSEC-3535	END CAP for profile 35 x 35

4. PROFILE NUT KITS

- Bolt, washer and nut

FSNK-30M8	PROFILE NUT KIT M8 x 30
FSNK-30M10	PROFILE NUT KIT M10 x 30

PROFILE NUT POSITIONER

FSN-M8	M8 PROFILE NUT POSITIONER
FSN-M10	M10 PROFILE NUT POSITIONER

5. THREADED RODS

- Electro zinc

FSTR-1M6	THREADED ROD, M6 x 100, length:1 m
FSTR-1M8	THREADED ROD, M8 x 125, length:1 m

6. BEAM CLAMPS

- Electro zinc plated

FSBC-M6	BEAM CLAMP M6
FSBC-M8	BEAM CLAMP M8




FSCO-3550

FSNK-30M8




FSN-M8

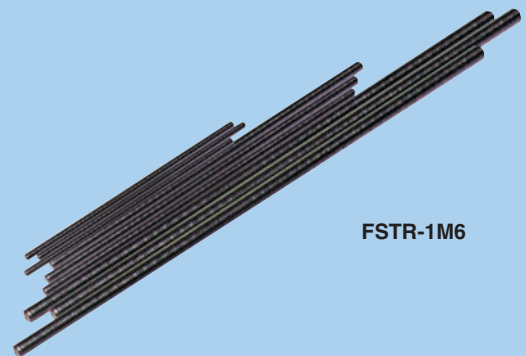

FSTR-1M6



FSBC-M8



FSTR-1M6